

SOLAR KIT MODEL: SEM-T35000



35000 Solar PV Hybrid Kit
5040 kWh per month production
168000Wh per day production

Quantity	Description
140	Solar panels 250W Polycrystalline
1	Solar Inverter Ingecone Sun 3 Play 33 TL P
70	Support structure for solar panels
3	15m DC cables 1x5.6mm R1000 2 core PV panel to charge controller with thimble at ends
3	5m AC cable 1x5,6mm R1000 2 core inverter to main breaker with thimble at ends
1	1 installation tool kit

SYSTEM WARRANTY*:

Solar modules production:	25 years
Module support structure:	25 years
Inverters:	5 years standard, (extendable to 25 years)

Quality of Components:

Manufactured in EU.

All components in the kit are high quality with CE standard

Description

SITECNO solar kits for hybrid system with diesel generator, batteries and grid are complete solutions which also provide energy in all unforeseen situations that may lead either by time, by circumstances of outage and any situation. It is a complete solution for saving your energy costs and fuel.

Kits advantages

- Easy to organize the order through a unique code and provider
- Compatibility between all components secured
- Measurement of energy flows installation
- CE Highest quality components
- Support pre (Combiner Box) enclosures configured to facilitate mounting installation.

- Possibility of dimensioning variants references listed kits for other power settings (on request)

Function of the system

1. The place uses the solar energy produced by photovoltaic modules during the hours of sun, plus the excess energy store in the batteries.
2. The diesel generator is the last option when the load does not get solar energy, and there is load shedding in the grid. In these situations the location consumes energy from diesel generator.

Modular system

These systems are module type and can be installed as per your space and requirement. You can ask for additional services as state-of-the-art designing, drawings, engineering and installation of your projects.

Solar kits with modular system can be extended to MW projects

Solar Kit Applications:

- | | | |
|--------------------------------------|-------------------------|--------------------------|
| • Schools | • Hospitals | • Hotels |
| • Restaurants | • Resorts | • Scout camps |
| • Gymnasium | • Service centres | • Petrol Stations |
| • Electric vehicle charging stations | | • Parking Areas |
| • Gardens | • Multi story buildings | • Old houses |
| • Markets | • Shopping malls | • Public service offices |
| • Administration buildings | | |

Additional Accessories

You can ask for additional accessories for extension at your installation or shifting of your system to another place.

Installation Training Services

Training of installation is offered for technical persons on time to time basis. Schedule of the training session announce on web site.

Operation and maintenance services

Operation and maintenance services offered for the valued customers for efficient operation of the system. Customers may ask for the O&M service contract with the company.

Monitoring services

In order to monitor solar power systems, data can be transmitted to remote locations. For communication between the solar inverter and monitoring devices, SITECNO provides two basic choices: Wireless or Blue-tooth and wired variants.



Polycrystalline Solar Module 250W

SITECNO Solar Photovoltaic Panels stand for quality, durability and most importantly, high performance. Our experience, capacity of research, continuing development and improvement have turned us into a company recognized in the sector by the high value offered to our clients.

Due to their engineered hollow section frame and its 4mm special textured glass with AR coating, SITECNO modules meet the maximum demands with regard to stability and corrosion resistance.

Thanks to their high performance SITECNO modules are prepared for changes in legislation. These panels will produce 5% more than any other of the same features.

The performance warranty is for 25 years, after 12 years, modules still produce a minimum 90% of their nominal performance. After 25 years module still produce a minimum 80% of their nominal performance.

Electrical Characteristics:

MODEL	SI-P60-250
Nominal Power (Pmax)	250W
Open Circuit Voltage (VOC)	37,5V
Short Circuit Current (ISC)	8,76A
Voltage at Nominal Power (Vmp)	30,3V
Current at Nominal Power (Imp)	8,24A
Module Efficiency (%)	15,20

Mechanical Characteristics:

Cell type	Polycrystalline 156x156mm
Number of cells	60 (6x10)
Module dimension	1660 x 990 x 50mm
Weight	20kg
Front cover	TSG low-iron tempered glass
Frame	Aluminium alloy
Junction box	IP65, 3 diodes
Cable length	1200mm (+) , 800mm(-)
Connector	PV-JM601



Temperature Coefficients:

Nominal Operating Cell Temperature	25°C ±2°C
Temperature Coefficients of Pmax	-0.43% / °K
Temperature Coefficients of Voc	-0.31% / °K
Temperature Coefficients of Isc	0.04% / °K
Operating Temperature	-40 °C to +85 °C
Maximum System Voltage	1000V DC
Reverse current load	15A



SUN 3 PLAY 33000TL

A three-phase inverter family for domestic, industrial and large-scale PV plants.

BENEFITS

- The best possible price.
- High efficiency rates.
- Easy maintenance.
- Standard 5 year warranty, extendable for up to 25 years

MAIN FEATURES

- MPPT system.
- 98.5% maximum efficiency.
- Digital inputs.
- RS-485 communications supplied as standard.
- Inverter firmware updating by the user through a SD memory card.
- Software SUN Manager for PV plant access and data registration.
- Software SUN Monitor for PV plant monitoring.
- LCD display.
- Easy maintenance.
- Display-configurable potential-free contact, to indicate insulation fault or grid connection.
- Plug & Play technology.
- Suitable for indoor and outdoor installations (IP65).
- High temperature performance.
- Different versions to satisfy every project needs.
- Compact design.
- Language, rated voltage and Country Code configurable by display.



The new SUN 3Play inverter family -for domestic, commercial and industrial applications- features a single power conversion stage with an advanced maximum power point tracking system (MPPT) that allows achieving a 98.5% maximum efficiency level.

Thanks to its steel and aluminium casing, especially designed for indoor and outdoor installation (IP65), it withstands very high temperatures, providing its rated power up to 55°C. The SUN 3Play inverters feature an internal datalogger for up to 3 months data storage. RS-485 communications are supplied as standard.

PROTECTIONS

- Reverse polarity.
- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.

OPTIONAL ACCESORIES

- Inverter communication via Ethernet, Bluetooth, GSM / GPRS or Wi-Fi. A second RS-485 communication card is available.
- Self-consumption kit.



Input (DC)

Recommended PV array power range ⁽¹⁾	34 - 45 kW
Voltage range MPP	560 - 820 V
Min. voltage for P _{nom} at rated V _{ac}	560 V
Maximum voltage ⁽²⁾	1,000 V
Maximum current ⁽³⁾	61 A
Inputs for the S and S+ versions	1
Inputs for the P and P+ versions ⁽⁴⁾	8
MPPT	1

Output (AC)

Rated power	33 kW
Max. temperature at rated power ⁽⁵⁾	45 °C
Maximum current	48 A
Rated voltage	400 V
Voltage range	277 - 528 V
Frequency	50 / 60 Hz
Phi Cosine ⁽⁶⁾	1
Phi Cosine adjustable	Yes. S _{max} =33 kVA
THD	<3%

Efficiency

Maximum efficiency	98.5%
Euroefficiency	98.3%

General Information

Refrigeration system	Forced ventilation
Air flow	400 m ³ /h
Stand-by consumption ⁽⁷⁾	10 W
Consumption at night	1 W
Ambient temperature	-25 °C to 65 °C
Relative humidity (non-condensing)	0 - 95%
Protection class	IP65
Marking	CE
EMC and security standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, AS3100
Grid connection standards	RD1699/2011, DIN V VDE V 0126-1-1, EN 50438, CEI 0-16 Ed. III, CEI 0-21, VDE-AR-N 4105:2011-08, G59/2, G83/2(8), P.O.12.3, AS4777.2, AS4777.3, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, South African Grid code, Chilean Grid Code, Romanian Grid Code, Ecuadorian Grid Code, Peruvian Grid code, IEEE 929, Thailand MEA & PEA requirements, DEWA (Dubai) Grid Code, Jordan Grid Code

Notes: (1) Depending on the type of installation and geographical location (2) Must not be exceeded under any circumstances. Consider the voltage increase of the 'V_{oc}' at low temperatures (3) The maximum current per PV connector is 11 A (4) Optionally, the DC inputs could be duplicated (5) For each °C of increase, the output power will be reduced at the rate of 1.8% (6) For P_{out}>25% of the rated power (7) Consumption from PV field (8) Related only to inverters up to 16 A.



Design

Technical feature

Weight

Loads

Test certificate

Cable:

- Model:
- Rated Voltage:
- Rating Current:
- Cable Size:
- Proof Voltage:
- Protection Class:
- Temperature Range:
- Flame class:

Connector:


Flexible conductor,
Maximum service temperature:
Estimated lifetime
UV Resistant UV Resistant
Grease & mineral oils resistance:
Grease & mineral oils resistance:

Modular type

Aluminium
25 years warranty
Tamper proof nut bolt
100% recyclable material
A2 Stainless steel bolts
2,49kg/m
wind, snow
CE Certifies

SI-MC4-F
TUV 1500V DC / UL 600V DC
20-30A
2.5-4.0-6.0, 10-12-14AWG
TUV 1500V AC, 1 min
Class II
-40 to 85°C
UL94-V0


class 5
120°C
30 years.
excellent
excellent

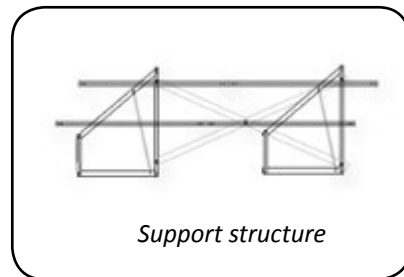

Support structure



Cable with connector

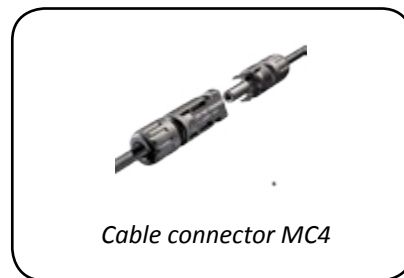

Cable connector MC4




INSTALLATION APPLICATION

- Instant self-consumption system with feed in grid (on grid)
- Instant self-consumption system without feed in to the grid (on grid)
- Solar system hybrid with diesel generator (on grid)





Authorised distributor:

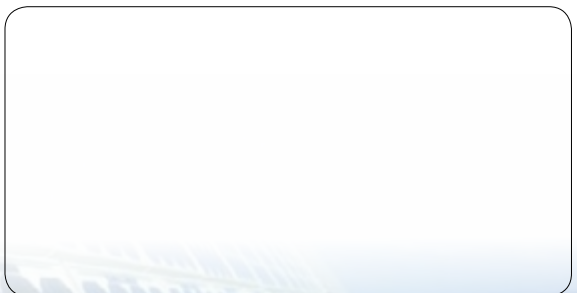

SITECNO S.A.
C/ Can balmes 1, Zona industrial,
Santa. M^a. de Palautordera,
08460 Barcelona, Spain.
Tel: +34 938482544
Fax: +34 938480439
info@sitecnosolar.com
www.sitecnosolar.com

