

SOLAR ENERGY KIT MODEL: SEM-CS750



Introduction:

SITECNO solar energy kit is on-grid PV system, a complete solution which generates electrical energy for self-consumption and feed surplus energy in to the grid as per legislation of the country. Solar PV panels generates DC electric power when exposed in sun light. High efficiency MPPT PV inverter converts DC electric power in to AC electric power for consumption in load. Grid power supply is connected in parallel circuit with PV inverter AC output. Solar generated electric power has first priority for consumption in load and additional power can be retrieved from the grid supply if required. Solar energy system can be hybrid with diesel generator power for the operation as PV-diesel hybrid system. Solar energy system is useful for saving in electricity bill, saving in diesel fuel consumption and source of income by selling surplus energy to the grid.

PV System output :

750 Wp Solar PV Power on-grid kit
108 kWh Energy generation per day (average)
3,6 kWh Energy generation per month (average)

Equipment and components list:

Quantity	Description
3	250 Wp Solar photovoltaic Si-polycrystalline panels
1	2,5 kW Solar PV on-grid inverter 1 Play O/P 220-230V, 50Hz
3	unit Aluminium support structure for solar PV panels mounting
36	m DC cables 6mm R1000 PV panel to inverter
5	m AC cable 2 core inverter to main breaker
2	pair Solar PV cable connectors MC4
1	set Support structure installation tools
1	set Instructions manual for installation
1	set Electrical design layout

SYSTEM WARRANTY:

Solar modules production: 25 years
Module support structure: 25 years
Inverters: 5 years standard, (extendible to 25 years)

Quality of Components:

All equipment and components in the kit are manufactured in EU with high quality CE standard.

Kits advantages

- Easy to organize the order through a unique code and provider.
- Compatibility between all components secured.
- Measurement of energy flows installation.
- CE highest quality components.
- Support structure with pre-design to facilitate plug & play mounting installation.

Function of the system

1. The load consume the solar energy produced by photovoltaic modules during the day hours time, plus the excess energy can be feed in to the grid as per legislation of the country.

2. The diesel generator connection is an other option when the load does not get enough solar energy, and there is instability in the grid supply network. In these situations the customer consumes energy from diesel generator.

Modular system

These systems are modular type and can be installed as per your space and requirement. You can ask for additional services as state-of-the-art designing, drawings, engineering and installation of your projects.

Solar kits with modular system can be extended to MW size projects

Solar Kit Applications:

- | | | |
|--------------------------------------|-------------------------|--------------------------|
| • Schools | • Hospitals | • Hotels |
| • Restaurants | • Resorts | • Scout camps |
| • Gymnasium | • Service centres | • Petrol Stations |
| • Gardens | • Multi story buildings | • Old houses |
| • Markets | • Shopping malls | • Public service offices |
| • Electric vehicle charging stations | • Parking Areas | |
| • Administration buildings | | |

Additional Accessories

Ask for additional accessories for extension at your installation or shifting of your PV system to another place.

Installation Training Services

Training of installation is offered for technical persons on time to time basis. Schedule of the training session announce on web site.

Operation and maintenance services


Operation and maintenance services offered for the valued customers for efficient operation of the system. Customers may ask for O&M service contract with the company.

Monitoring services

In order to monitor solar power generation and consumption from PV system, data can be transmitted to remote locations. For communication between the solar inverter and monitoring devices, SITECNO provides two basic choices: Wireless or Blue-tooth and wired variants.

ANNUAL ENERGY PRODUCTION by SOLAR ENERGY KIT MODEL: SEM-CS750

(annual global direct irradiation 2,97 kWh/m² in Madrid. Ref: source NASA-SSE)

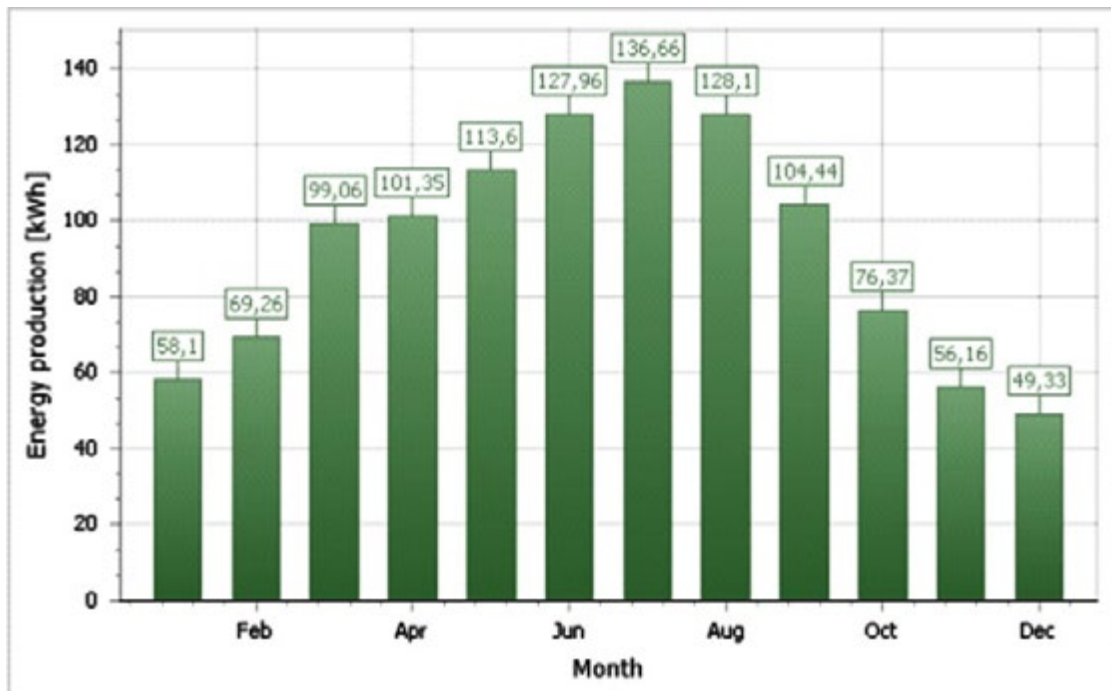

INSTALLATION APPLICATION

- Instant self-consumption system with feed in grid (on grid)
- Instant self-consumption system without feed in to the grid (on grid)
- Solar system hybrid with diesel generator (on grid)



Polycrystalline Solar Module 250W

SITECNO Solar Photovoltaic Panels stand for quality, durability and most importantly, high performance. Our experience, capacity of research, continuing development and improvement have turned us into a company recognized in the sector by the high value offered to our clients.

Due to their engineered hollow section frame and its 4mm special textured glass with AR coating, SITECNO modules meet the maximum demands with regard to stability and corrosion resistance.

Thanks to their high performance SITECNO modules are prepared for changes in legislation. These panels will produce 5% more than any other of the same features.

The performance warranty is for 25 years, after 12 years, modules still produce a minimum 90% of their nominal performance. After 25 years module still produce a minimum 80% of their nominal performance.

Electrical Characteristics:

MODEL	SI-P60-250
Nominal Power (Pmax)	250W
Open Circuit Voltage (V_{oc})	37,5V
Short Circuit Current (I_{sc})	8,76A
Voltage at Nominal Power (V_{mp})	30,3V
Current at Nominal Power (I_{mp})	8,24A
Module Efficiency (%)	15,20

Mechanical Characteristics:

Cell type	Polycrystalline 156x156mm
Number of cells	60 (6x10)
Module dimension	1660 x 990 x 50mm
Weight	20kg
Front cover	TSG low-iron tempered glass
Frame	Aluminium alloy
Junction box	IP65, 3diodes
Cable length	1200mm (+) , 800mm(-)
Connector	PV-JM601



Temperature Coefficients:

Nominal Operating Cell Temperature	25°C ±2°C
Temperature Coefficients of Pmax	-0.43% / °K
Temperature Coefficients of Voc	-0.31% / °K
Temperature Coefficients of Isc	0.04% / °K
Operating Temperature	-40 °C to +85 °C
Maximum System Voltage	1000V DC
Reverse current load	15A

SUN 1 PLAY 2.5TL M

The SUN 1Play TL M inverters have been designed to maximize the power generation and also to facilitate user access to the PV plant. This solar inverter family is valid for low kilowatt residential applications, and also for decentralized commercial and industrial systems rated up to several hundred kilowatts. Thanks to this High efficiency system and to the use of innovative electronic conversion topologies, values of up to 98% can be achieved. Every inverter can be accessed from either a remote PC or onsite from the inverter front touch key-pad through its LCD screen. The display also features a number of LEDs to indicate the inverter operating status.

BENEFITS

- The best possible price.
- High efficiency rates.
- Easy maintenance.
- Standard 5 year warranty, extendable for up to 25 years.

MAIN FEATURES

- Compatible with 30 mA RCDs.
- Double-MPPT system.
- Available from 2.5 up to 6 kW.
- 98% maximum efficiency.
- SiC Technology inside.
- Inverter updating by the user through a SD memory card.
- USB communications supplied as standard.
- Software SUN Manager for PV plant access and data registration.
- Software SUN Monitor for PV plant monitoring.
- LCD Display.
- Easy maintenance.
- Suitable for indoor and outdoor installations (IP65).
- Display-configurable potential free contact, to indicate insulation fault or grid connection.
- Compact design.
- Language, Country Code and rated voltage configurable by display.



The SUN 1Play inverters feature have been designed to obtain the maximum power from the PV array and to facilitate user access to the PV installation. Thus, this single-phase inverter family features renewed benefits that place them at the forefront of today's market.

PROTECTIONS

- Reverse polarity.
- Short circuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.

OPTIONAL ACCESSORIES

- Inverter communication via RS-485,
- Ethernet, Bluetooth, Wi-Fi or GSM / GPRS.
- DC switch.
- SUN WeatherBox for meteorological values measurement and registration.
- Digital inputs.
- Self-consumption kit.

TECHNICAL SPECIFICATION

Input (DC)

Recommended PV array power range ⁽¹⁾	2.8 - 3.3 kW
Voltage range MPPT1	125 - 750 V
Voltage range MPPT2	90 - 750 V
Min. voltage for P _{nom} at rated V _{ac}	125 V
Maximum voltage ⁽²⁾⁽³⁾	850 V
Maximum current (input 1 / input 2) ⁽⁴⁾	11 / 11 A
Inputs (input 1 / input 2) ⁽⁵⁾	1 / 1
MPPT	2

Output (AC)

Rated power	2.5 kW
Maximum current	16 A
Rated voltage	230 V
Frequency	50 / 60 Hz
Phi Cosine ⁽⁶⁾	1
Phi Cosine adjustable	Yes. S _{max} =2.5 kVA
THD	<3%

Efficiency

Maximum efficiency	97.6 %
Euro efficiency	97.3 %

General Information

Refrigeration system	Air
Stand-by consumption ⁽⁷⁾	<10 W
Consumption at night	0 W
Ambient temperature	-20 °C to +65 °C
Relative humidity (non-condensing)	0 - 100%
Protection class	IP65
Marking	CE
EMC and security standards	

EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, AS3100

Grid connection standards

RD1699/2011, DIN V VDE V 0126-1-1, EN 50438, CEI 0-16 Ed. III, CEI 0-21, VDE-AR-N 4105:2011-08, G59/2, G83/2⁽⁸⁾, P.O.12.3, AS4777.2, AS4777.3, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, South African Grid code, Chilean Grid Code, Romanian Grid Code, Ecuadorian Grid Code, Peruvian Grid code, IEEE 929, Thailand MEA & PEA requirements, DEWA (Dubai) Grid Code, Jordan Grid Code

Notes: (1) Depending on the type of installation and geographical location (2) Must not be exceeded under any circumstances. Consider the voltage increase of the 'Voc' at low temperatures (3) The maximum current per PV connector is 11 A (4) Optionally, the DC inputs could be duplicated (5) For each °C of increase, the output power will be reduced at the rate of 1.8% (6) For P_{out}>25% of the rated power (7) Consumption from PV field (8) Related only to inverters up to 16 A.

KIT COMPONENTS

Design

Technical feature

Weight

Loads

Test certificate

Modular type

Aluminium

25 years warranty

Tamper proof nut bolt


100% recyclable material

A2 Stainless steel bolts

2,49kg/m

wind, snow

CE Certifies

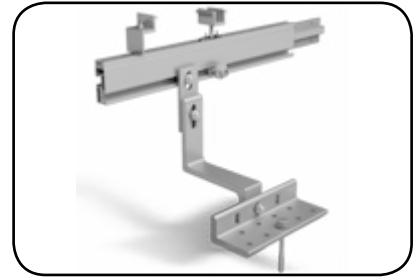

Cable:

· Model:

· Rated Voltage:

· Rating Current:

· Cable Size:

· Proof Voltage:

· Protection Class:

· Temperature Range:

· Flame class:

SI-MC4-F

TUV 1500V DC / UL 600V DC

20-30A


2.5-4.0-6.0, 10-12-14AWG

TUV 1500V AC, 1 min

Class II

-40 to 85°C

UL94-V0

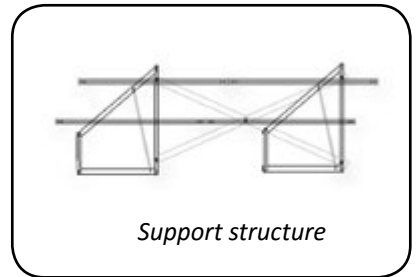

Support structure

Connector:

Flexible conductor,

Maximum service temperature:

Estimated lifetime

UV Resistant UV Resistant

Grease & mineral oils resistance:

Grease & mineral oils resistance:

class 5

120°C


30 years.

excellent

excellent



Cable with connector

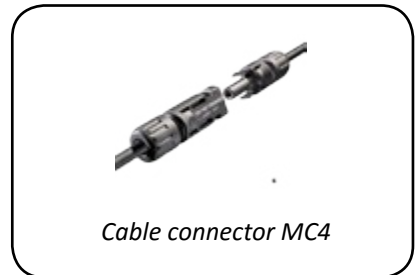

Cable connector MC4

ORDER REFERENCES NUMBER

REF.#	Model#	Description	PVP
14001	SEM-ES750	Complete plug and play without support structure	€ 2.468,37
14101	SEM-CS750	Complete plug and play with all necessary components	€ 2.877,95



Authorised distributor:

SITECNO S.A.
C/ Can balmes 3, Zona industrial,
Santa. M^a. de Palautordera,
08460 Barcelona, Spain.
Tel: +34 938482544
Fax: +34 938480439
info@sitecnosolar.es
www.sitecnosolar.es

